

ISO/IEC JTC1/SC17 N 3501

WG8 N 1453

DOCUMENT TYPE: Notification of Ballot

TITLE: Notification of Ballot: ISO/IEC CD 14443-2.3 (Revision) –
Identification Cards – Contactless integrated circuit(s) cards – Proximity cards
– Part 2: Radio frequency power and signal interface.

BACKWARD POINTER: N 3218, N 3261, N 3390, N 3391, N 3445 and N 3500

SOURCE: SECRETARIAT ISO/IEC JTC1/SC17

STATUS: Disposition of comments for 17n3445 are contained in 17n3500.

This ballot has been posted to the ISO Electronic balloting application and is available under the Balloting Portal, Committee Internal Balloting.

ACTION ID: FYI

WORK ITEM: 1.17.17.2

DUE DATE: 2008-09-11

DISTRIBUTION: P and L-Members of ISO/IEC JTC1/SC17
JTC1 Secretariat
ISO/IEC ITTF

MEDIUM: SERVER

NO. OF PAGES: 32

ISO/IEC JTC 1/SC 17 N

Date 2008-06-11

ISO/IEC CD 14443-2.3

ISO/IEC JTC 1/SC 17/WG 8

Secretariat: DIN (florian.peters@bdr.de)

Identification cards — Contactless integrated circuit(s) cards - Proximity cards — Part 2: Radio frequency power and signal interface

Cartes d'identification — Cartes à circuit(s) intégrés sans contacts - Cartes de proximité — Partie 2: Interface radio fréquence

Warning

This document is not an ISO International Standard. It is distributed for review and comment. It is subject to change without notice and may not be referred to as an International Standard.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Document type: International Standard
Document subtype:
Document stage: (30) Committee
Document language: E

Copyright notice

This ISO document is a working draft or committee draft and is copyright-protected by ISO. While the reproduction of working drafts or committee drafts in any form for use by participants in the ISO standards development process is permitted without prior permission from ISO, neither this document nor any extract from it may be reproduced, stored or transmitted in any form for any other purpose without prior written permission from ISO.

Requests for permission to reproduce this document for the purpose of selling it should be addressed as shown below or to ISO's member body in the country of the requester:

[Indicate the full address, telephone number, fax number, telex number, and electronic mail address, as appropriate, of the Copyright Manger of the ISO member body responsible for the secretariat of the TC or SC within the framework of which the working document has been prepared.]

Reproduction for sales purposes may be subject to royalty payments or a licensing agreement.

Violators may be prosecuted.

Contents

Page

Foreword	iv
Introduction.....	v
1 Scope	1
2 Normative reference(s).....	1
3 Term(s) and definition(s).....	1
4 Symbols (and abbreviated terms).....	2
5 Initial dialogue for proximity cards.....	3
6 Power transfer	4
6.1 Frequency.....	4
6.2 Operating field.....	4
7 Signal interface	5
8 Communication signal interface Type A	6
8.1 Communication PCD to PICC.....	6
8.1.1 Bit rate	6
8.1.2 Modulation.....	7
8.1.3 Bit representation and coding	15
8.2 Communication PICC to PCD.....	16
8.2.1 Bit rate	16
8.2.2 Load modulation	17
8.2.3 Subcarrier	18
8.2.4 Subcarrier modulation.....	18
8.2.5 Bit representation and coding	18
9 Communication signal interface Type B	19
9.1 Communication PCD to PICC.....	19
9.1.1 Bit rate	19
9.1.2 Modulation.....	19
9.1.3 Bit representation and coding	25
9.2 Communication PICC to PCD.....	26
9.2.1 Bit rate	26
9.2.2 Load modulation	26
9.2.3 Subcarrier	26
9.2.4 Subcarrier modulation.....	26
9.2.5 Bit representation and coding	26

Foreword

This revision comprises the replacements and additions of ISO/IEC 14443-2:2001/Amd.1:2005(E).

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

ISO/IEC 14443-2 was prepared by Joint Technical Committee ISO/IEC JTC 1, Subcommittee SC 17.

This second edition cancels and replaces the first edition including ISO/IEC 14443-2:2001/AM.1:2005 (E). Clause 6, 8 and 9 have been technically revised and clause 10 has been removed.

ISO/IEC 14443 consists of the following parts, under the general title *Identification cards — Contactless integrated circuit(s) cards - Proximity cards*:

Part 1: Physical characteristics

Part 2: Radio frequency power and signal interface

Part 3: Initialization and anticollision

Part 4: Transmission protocol

Introduction

ISO/IEC 14443 is one of a series of International Standards describing the parameters for identification cards as defined in ISO/IEC 7810 and the use of such cards for international interchange.

This part of ISO/IEC 14443 describes the electrical characteristics of two types of contactless interface between a proximity card and a proximity coupling device. The interface includes both power and bi-directional communication.

Contactless card Standards cover a variety of types as embodied in ISO/IEC 10536 (Close-coupled cards), ISO/IEC 14443 (Proximity cards), ISO/IEC 15693 (Vicinity cards). These are intended for operation when very near, nearby and at a longer distance from associated coupling devices respectively.

Identification cards — Contactless integrated circuit(s) cards - Proximity cards — Part 2: Radio frequency power and signal interface

1 Scope

This part of ISO/IEC 14443 specifies the characteristics of the fields to be provided for power and bi-directional communication between proximity coupling devices (PCDs) and proximity cards (PICCs).

This part of ISO/IEC 14443 shall be used in conjunction with other parts of ISO/IEC 14443.

This part of ISO/IEC 14443 does not specify the means of generating coupling fields, nor the means of compliance with electromagnetic radiation and human exposure regulations which can vary according to country.

2 Normative reference(s)

The following normative documents contain provisions which, through reference in this text, constitute provisions of this part of ISO/IEC 14443. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this part of ISO/IEC 14443 are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to apply. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO/IEC 10373-6, *Identification cards - Test methods - Part 6 - Proximity cards*

ISO/IEC 14443-1, *Identification cards – Contactless integrated circuit(s) cards – Proximity cards – Part 1: Physical characteristics.*

ISO/IEC 14443-3, *Identification cards – Contactless integrated circuit(s) cards – Proximity cards – Part 3: Initialization and anticollision.*

3 Term(s) and definition(s)

For the purposes of this part of ISO/IEC 14443, the following terms and definitions apply:

3.1

bit duration

time during which a logic level is defined, at the end of which a new bit starts.

3.2

binary phase shift keying

phase shift keying where the phase shift is 180°, resulting in two phase state possibilities.

3.3 modified Miller
a method of bit coding whereby a logic level during a bit-duration is represented by the position of a pulse within the bit-frame.

3.4 modulation index m
defined as $[1-b]/[1+b]$ where b is the ratio between the modulated amplitude and the initial signal amplitude. The value of the index may be expressed as a percentage.

3.5 NRZ-L
method of bit coding whereby a logic level during a bit duration is represented by one of two defined physical states of a communication medium.

3.6 subcarrier
signal of frequency f_s used to modulate a carrier of frequency f_c .

3.7 Manchester
method of bit coding whereby a logic level during a bit duration is represented by a sequence of two defined physical states of a communication medium. The order of the physical states within the sequence defines the logical state.

3.8 TR0
guard time between the end of a PCD transmission and the start of the PICC subcarrier generation.

3.9 TR1
synchronization time between the start of the PICC subcarrier generation and the start of the PICC subcarrier modulation.

4 Symbols (and abbreviated terms)

ASK	Amplitude Shift Keying
BPSK	Binary Phase Shift Keying
NRZ-L	Non-Return to Zero, (L for level)
OOK	On/Off Keying
PauseA	PCD Modulation pulse, Type A
PCD	Proximity Coupling Device
PICC	Proximity Card (or object)
RF	Radio Frequency
a	Pulse shape factor, Type A
b	Ratio between the modulated and initial signal amplitude, Type B

f_c	Frequency of operating field (carrier frequency)
f_s	Frequency of subcarrier
h_f	Modulation overshoot, Type B
H_{INITIAL}	Field strength of the unmodulated RF field
h_{ovs}	Modulation overshoot, Type A
h_r	Modulation overshoot, Type B
h_f	Modulation undershoot, Type B
$\emptyset 0$	Initial phase of the subcarrier
t_1	PauseA length
t_2	PauseA "Low" time for bit rate of $f_c/128$
t_3	PauseA rise time for bit rate of $f_c/128$
t_4	PauseA rise time section for bit rate of $f_c/128$
t_5	PauseA "Low" time for bit rates of $f_c/64$, $f_c/32$, $f_c/16$
t_6	PauseA rise time for bit rates of $f_c/64$, $f_c/32$, $f_c/16$
$t_{6, \text{max, PCD}}$	Maximum value of t_6 for PCD transmission
$t_{6, \text{max, PICC}}$	Maximum value of t_6 for PICC reception
t_b	Bit duration
t_f	Modulation fall time
$t_{f, \text{max, PCD}}$	Maximum fall time for PCD transmission
$t_{f, \text{max, PICC}}$	Maximum fall time for PICC reception
t_r	Modulation rise time
$t_{r, \text{max, PCD}}$	Maximum rise time for PCD transmission
$t_{r, \text{max, PICC}}$	Maximum rise time for PICC reception
t_x	Pulse position
V_{LMA}	Load modulation amplitude PICC

5 Initial dialogue for proximity cards

The initial dialogue between the PCD and the PICC shall be conducted through the following consecutive operations:

- activation of the PICC by the RF operating field of the PCD,

- the PICC shall wait silently for a command from the PCD,
- transmission of a command by the PCD,
- transmission of a response by the PICC.

These operations shall use the RF power and signal interface specified in the following clauses.

6 Power transfer

The PCD shall produce a high frequency alternating magnetic field. This field inductively couples to the PICC to transfer power and is modulated for communication.

6.1 Frequency

The frequency f_c of the RF operating field shall be 13,56 MHz \pm 7 kHz.

6.2 Operating field

The PCD shall generate a field strength of at least H_{min} and not exceeding H_{max} at manufacturer specified positions (operating volume) under unmodulated conditions.

Table 1 — PCD field strength

PCD	
H_{min}	H_{max}
1,5 A/m (rms)	7,5 A/m (rms)

In addition the PCD shall be capable of powering any single reference PICC (defined in ISO/IEC 10373-6) at manufacturer specified positions (operating volume).

The PCD shall not generate a field higher than the value specified in ISO/IEC14443-1:2008, 4.4 (alternating magnetic field) in any possible PICC position and orientation.

Test methods for the PCD operating field are defined in ISO/IEC 10373-6.

The PICC shall operate as intended continuously between H_{min} and H_{max} . This includes all PICC requirements defined in this standard and processing of the manufacturer specified set of commands.

Table 2 — PICC operating field

PICC	
H_{min}	H_{max}
1,5 A/m (rms)	7,5 A/m (rms)

NOTE Margins are effectively included by the test methods as specified in ISO/IEC 10373-6.

7 Signal interface

The PCD modulates the amplitude of the alternating magnetic field with modulation pulses, in order to transmit data from the PCD to the PICC.

The PICC loads the alternating magnetic field with a modulated subcarrier signal (load modulation), in order to transmit data from the PICC to the PCD.

Within manufacturer specified operating volume the PCD shall generate modulation pulses as described in the following clauses and shall be capable of receiving the minimum load modulation amplitude.

NOTE As an indication of the operating volume, the manufacturer may give the operating range (e.g. 0 to X cm) within which all ISO/IEC 14443-2 requirements are fulfilled.

Test methods for the PCD communication signal interface are defined in ISO/IEC 10373-6.

Two communication signal interfaces, Type A and Type B, are described in the following clauses. The PCD shall alternate between modulation methods when idling before detecting the presence of a PICC of Type A or Type B.

Only one communication signal interface may be active during a communication session until deactivation by the PCD or removal of the PICC. Subsequent session(s) may then proceed with either modulation method.

Figures 1 and 2 illustrate the concepts described in the following clauses.

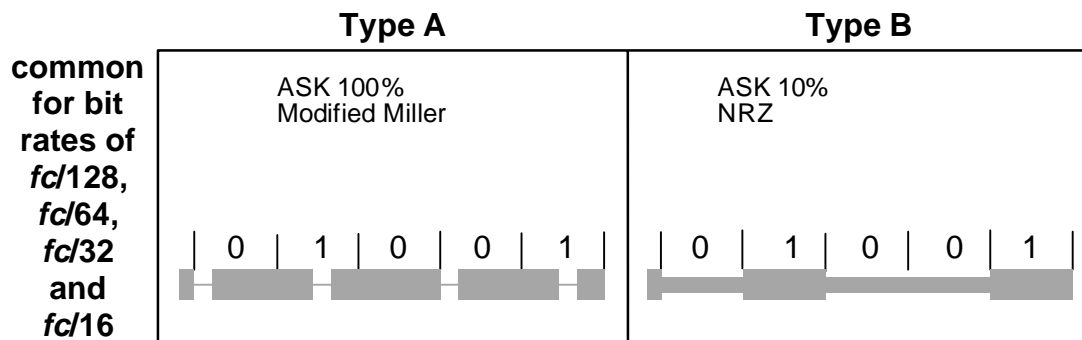


Figure 1 — Example PCD to PICC communication signals for Type A and Type B interfaces

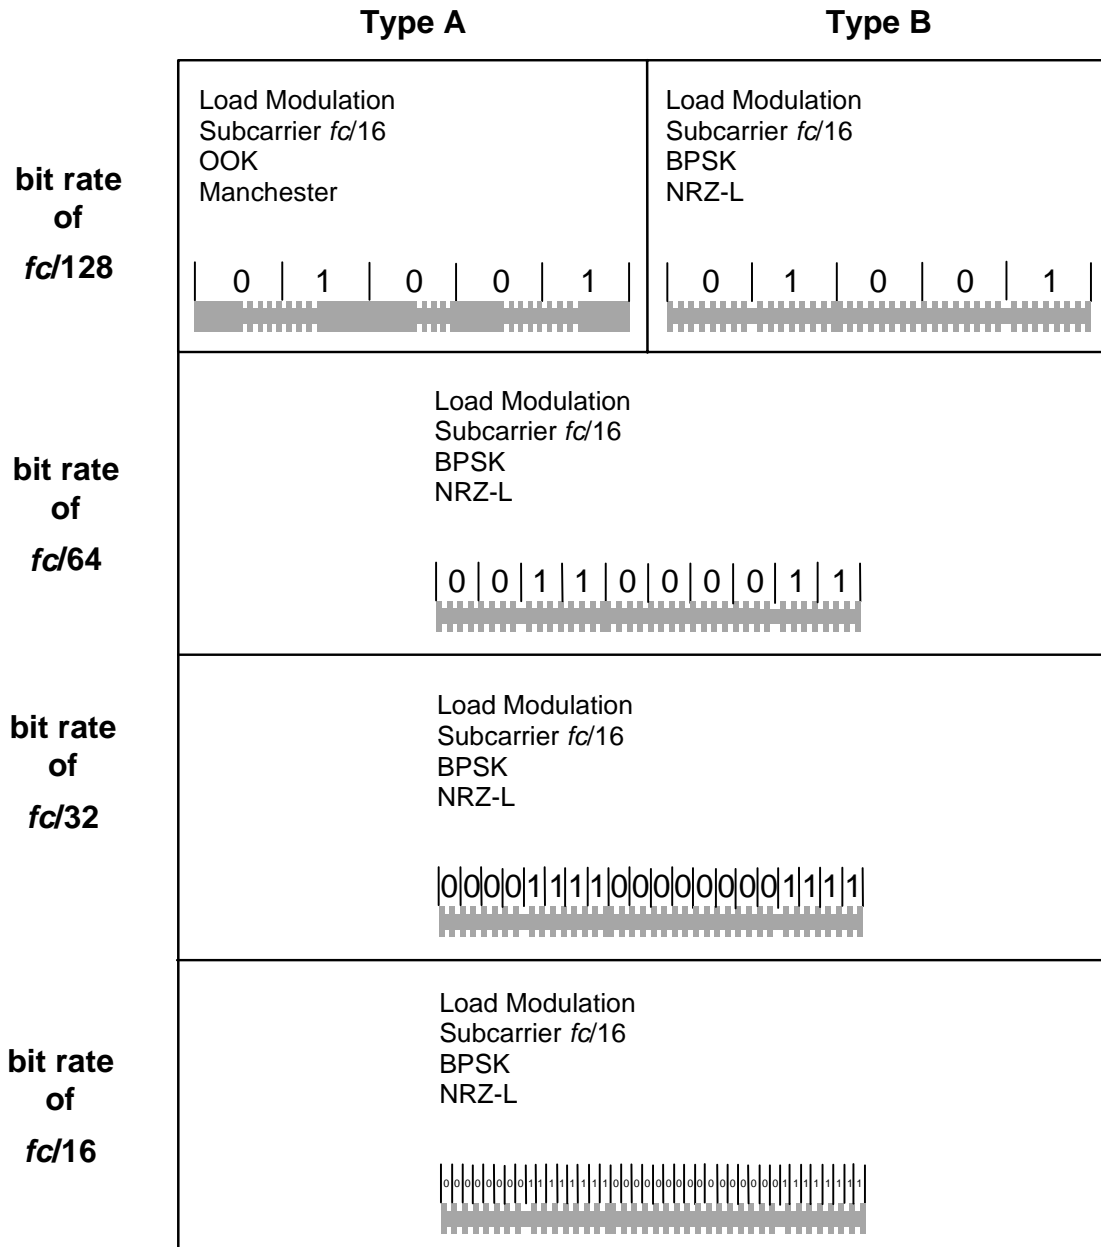


Figure 2 — Example PICC to PCD communication signals for Type A and Type B interfaces

8 Communication signal interface Type A

8.1 Communication PCD to PICC

8.1.1 Bit rate

The bit rate for the transmission during initialization and anticollision shall be $fc/128$ (~106 kbit/s).

The bit rate for the transmission after initialization and anticollision shall be one of the following:

- $fc/128$ (~106 kbit/s),
- $fc/64$ (~212 kbit/s),

- $fc/32$ (~424 kbit/s),
- $fc/16$ (~848 kbit/s).

8.1.2 Modulation

8.1.2.1 Modulation for a bit rate of $fc/128$

Communication from PCD to PICC for a bit rate of $fc/128$ shall use the modulation principle of ASK 100 % of the RF operating field to create a PauseA as shown in Figure 3.

The envelope of the PCD field shall decrease monotonically to less than 5 % of its initial value $H_{INITIAL}$ and remain less than 5 % for more than t_2 . This envelope shall comply with Figure 3.

If the envelope of the PCD field does not decrease monotonically, the time between a local maximum and the time of passing the same value before the local maximum shall not exceed 0,5 μ s. This shall only apply if the local maximum is greater than 5 % of $H_{INITIAL}$.

The PauseA length t_1 is the time between 90 % of the falling edge and 5 % of the rising edge of the H-field signal envelope.

In case of an overshoot the field shall remain within 90 % of $H_{INITIAL}$ and 110 % of $H_{INITIAL}$.

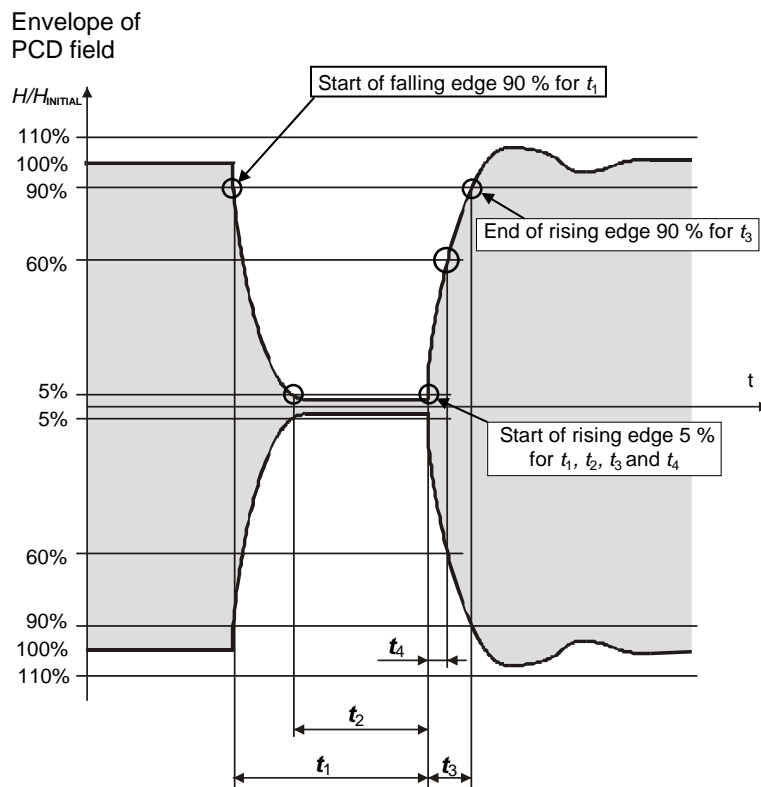


Figure 3 — PauseA for a bit rate of $fc/128$

The PCD shall generate a PauseA with timing parameter defined in Table 3.

Table 3 — PCD transmission: PauseA timing parameter for a bit rate of $fc/128$

Parameter	Min	Max
t_1	$38/fc$	$40,5/fc$
t_2	$7/fc$	t_1
t_3	$1,5 \times t_4$	$16/fc$
t_4	0	$6/fc$

NOTE 1 PCD implementations may be restricted to generate a PauseA with values of $t_1=n/fc$ (n =integer). Therefore measurement of t_1 should be rounded to the closest n in the unit $1/fc$.

NOTE 2 The maximum value of t_2 is a function of the measured value of t_1 .

NOTE 3 The minimum value of t_3 is a function of the measured value of t_4 .

The PICC shall be able to receive a PauseA with timing parameter defined in Table 4.

Table 4 — PICC reception: PauseA timing parameter for a bit rate of $fc/128$

Parameter	Min	Max
t_1	$37,5/fc$	$40,5/fc$
t_2	$6/fc$	t_1
t_3	$1,5 \times t_4$	$17/fc$
t_4	0	$7/fc$

NOTE 1 The maximum value of t_2 is a function of the set value of t_1

NOTE 2 The minimum value of t_3 is a function of the set value of t_4 .

The timing parameters of the PCD modulation waveform for a bit rate of $fc/128$ shall remain within limits specified by the following expressions and illustrated in Figure 4.

For a bit rate of $fc/128$ the PICC shall be able to receive a modulation waveform with timing parameters specified by the following expressions and illustrated in Figure 4.

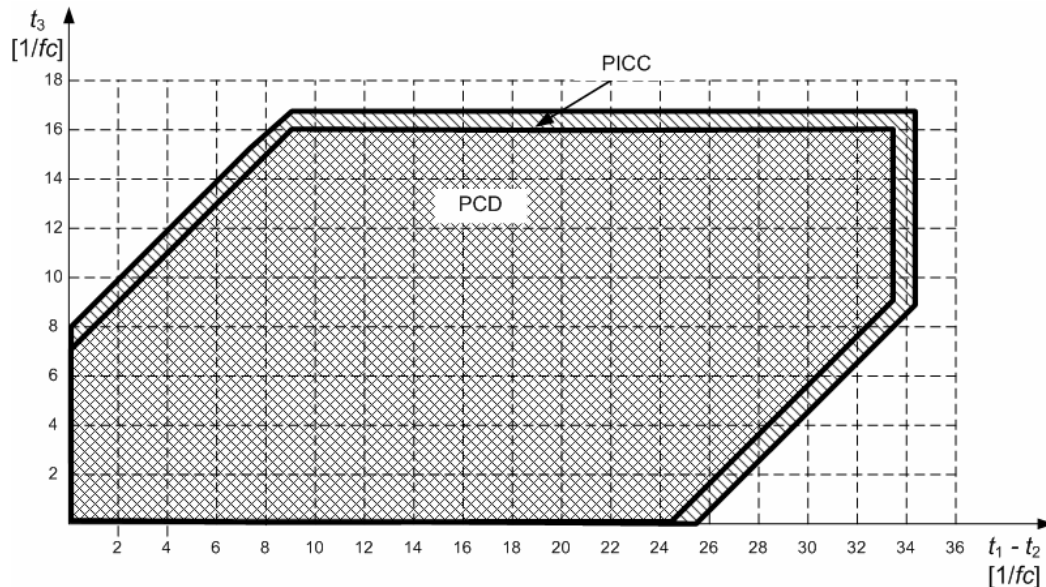


Figure 4 — Type A modulation waveform timing parameters for bit rate of $fc/128$

PCD:

- If the fall time characterized by $(t_1 - t_2)$ is within the interval $0/fc$ and $9/fc$, the rise time t_3 shall be within the interval $0/fc$ and $(t_1 - t_2) + 7/fc$.
- If the fall time characterized by $(t_1 - t_2)$ is within the interval $9/fc$ and $24,5/fc$, the rise time t_3 shall be within the interval 0 and $16/fc$.
- If the fall time characterized by $(t_1 - t_2)$ is within the interval $24,5/fc$ and $33,5/fc$, the rise time t_3 shall be within the interval $(t_1 - t_2) - 24,5/fc$ and $16/fc$.

PICC:

- If the fall time characterized by $(t_1 - t_2)$ is within the interval $0/fc$ and $9/fc$, the PICC shall be able to receive a modulation waveform with a rise time t_3 within the the interval $0/fc$ and $(t_1 - t_2) + 8/fc$.
- If the fall time characterized by $(t_1 - t_2)$ is within the interval $9/fc$ and $25,5/fc$, the PICC shall be able to receive a modulation waveform with a rise time t_3 within the the interval $0/fc$ and $17/fc$.
- If the fall time characterized by $(t_1 - t_2)$ is within the interval $25,5/fc$ and $34,5/fc$, the PICC shall be able to receive a modulation waveform with a rise time t_3 within the the interval $(t_1 - t_2) - 25,5/fc$ and $17/fc$.

The PICC shall detect the end of PauseA after the field exceeds 5 % of $H_{INITIAL}$ and before it exceeds 60 % of $H_{INITIAL}$. Figure 5 shows the definition of the end of PauseA. This definition applies to all modulation envelope timings.

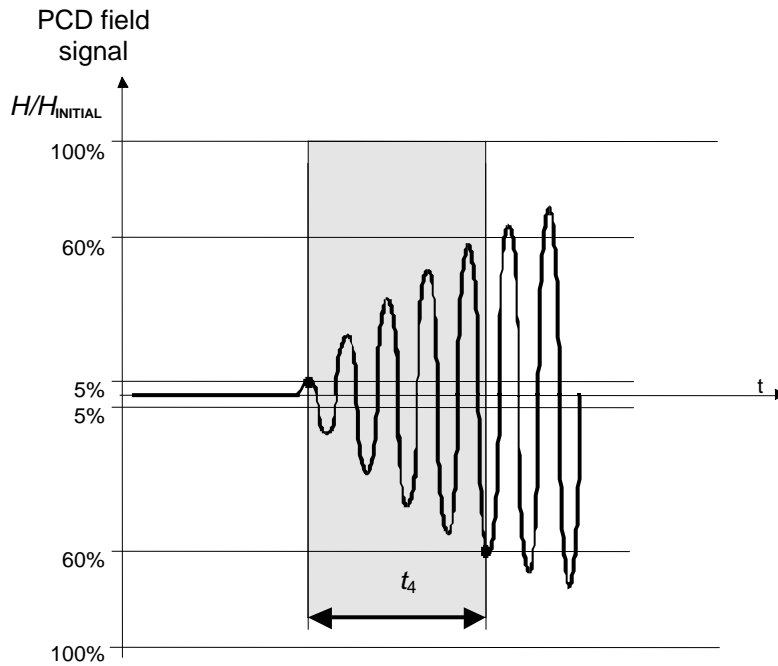


Figure 5 — End of PauseA for a bit rate of $fc/128$

8.1.2.2 Modulation for bit rates of $fc/64$, $fc/32$ and $fc/16$

Communication from PCD to PICC for bit rates of $fc/64$ (~212 kbit/s), $fc/32$ (~424 kbit/s) and $fc/16$ (~848 kbit/s) shall use the modulation principle of ASK of the RF operating field to create a PauseA as shown in Figure 6.

The envelope of the PCD field shall decrease monotonically to the maximum value of parameter 'a' as defined in Table 5. Then, if the envelope evolution becomes non-monotonic, the difference between any local maximum and the lowest previous minimum (within the same PauseA) shall not exceed 0,09 times the difference between the initial amplitude and the previous lowest minimum.

The parameter 'a' is the lowest minimum within PauseA.

Figure 6 is an illustration of PauseA for bit rates of $fc/64$, $fc/32$ and $fc/16$.

In case of an overshoot the field shall remain within $H_{INITIAL} (1-h_{ovs})$ and $H_{INITIAL}(1+h_{ovs})$.

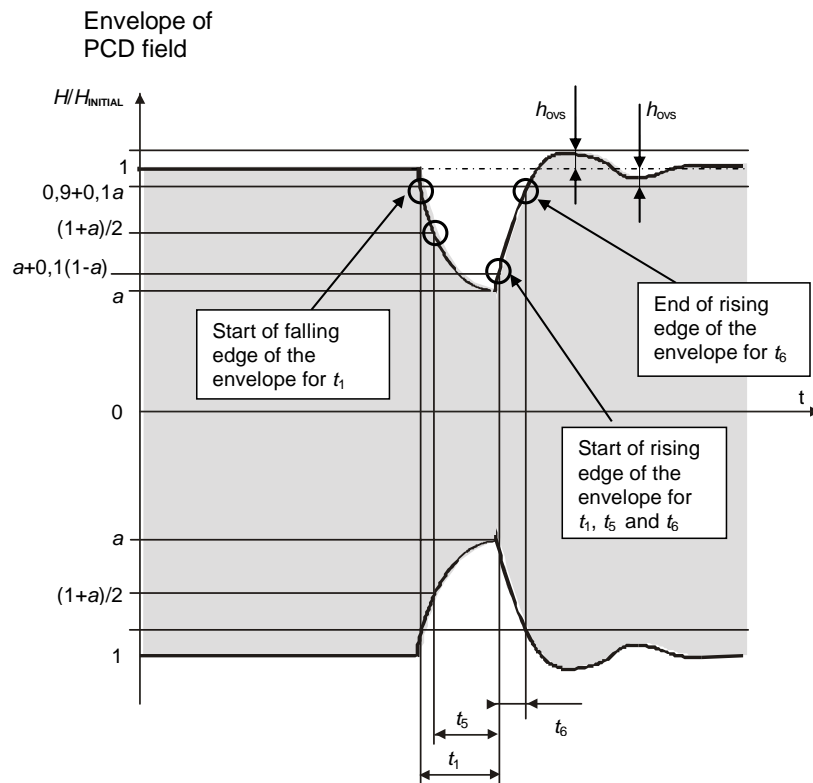


Figure 6 — PauseA for bit rates of $fc/64$, $fc/32$ and $fc/16$

The PCD shall generate a PauseA with timing and amplitude parameter defined in Table 5.

Table 5 — PCD transmission: PauseA parameter for bit rates of $fc/64$, $fc/32$ and $fc/16$

Parameter	Bit rate	Min	Max
a	$fc/64$	0	0,18
	$fc/32$	0	0,35
	$fc/16$	0,11	0,55
t_1	$fc/64$	$16/fc$	$20/fc$
	$fc/32$	$8,0/fc$	$10/fc$
	$fc/16$	$4,0/fc$	$5,5/fc$
t_5	$fc/64$	$t_1/2 + 4/fc$	t_1
	$fc/32$	$t_1/2 + 1/fc$	t_1
	$fc/16$	$t_1/2$	t_1
t_6	$fc/64$	see defining expressions below figure 7	
	$fc/32$	see defining expressions below figure 8	
	$fc/16$	see defining expressions below figure 9	
h_{ovs}	$fc/64, fc/32, fc/16$	0	$(1 - t_6/(2 \times t_{6, \max, PCD})) \times 0,10 \times (1-a)$

NOTE 1 The minimum and maximum value of t_5 are functions of the measured value of t_1 .

NOTE 2 The maximum value of h_{ovs} for PCD transmission is a function of the measured value of t_6 and of $t_{6, \max, \text{PCD}}$ (see expressions below figure 7, 8 or 9).

NOTE 3 PCD implementations may be restricted to generate a PauseA with values of $t_1=n/fc$ (n =integer). Therefore measurement of t_1 should be rounded to the closest n in the unit $1/fc$.

The PICC shall be able to receive a PauseA with timing and amplitude parameter defined in Table 6.

Table 6 — PICC reception: PauseA parameter for bit rates of $fc/64$, $fc/32$ and $fc/16$

Parameter	Bit rate	Min	Max
a	$fc/64$	0	0,2
	$fc/32$	0	0,4
	$fc/16$	0,1	0,6
t_1	$fc/64$	$16/fc$	$20/fc$
	$fc/32$	$8/fc$	$10/fc$
	$fc/16$	$4/fc$	$5,5/fc$
t_5	$fc/64$	$t_1/2 + 3/fc$	t_1
	$fc/32$	$t_1/2 + 1/fc$	t_1
	$fc/16$	$t_1/2$	t_1
t_6	$fc/64$	see defining expressions below figure 7	
	$fc/32$	see defining expressions below figure 8	
	$fc/16$	see defining expressions below figure 9	
h_{ovs}	$fc/64, fc/32, fc/16$	0	$(1 - t_6 / (2 \times t_{6, \max, \text{PICC}})) \times 0,11 \times (1-a)$

NOTE 1 The minimum and maximum values of t_5 are functions of the set value of t_1 .

NOTE 2 The maximum value of h_{ovs} for PICC reception is a function of the set value of t_6 and of $t_{6, \max, \text{PICC}}$ (see expressions below figure 7, 8 or 9).

NOTE 3 The PauseA length t_1 is the time between an envelope amplitude of $(0,9 + 0,1 \times a)$ on the falling edge and $(a + 0,1 \times (1-a))$ on the rising edge.

The timing parameters of the PCD modulation waveform for a bit rate of $fc/64$ shall remain within limits specified by the following expressions and illustrated in Figure 7.

For a bit rate of $fc/64$ the PICC shall be able to receive a modulation waveform with timing parameters specified by the following expressions and illustrated in Figure 7.

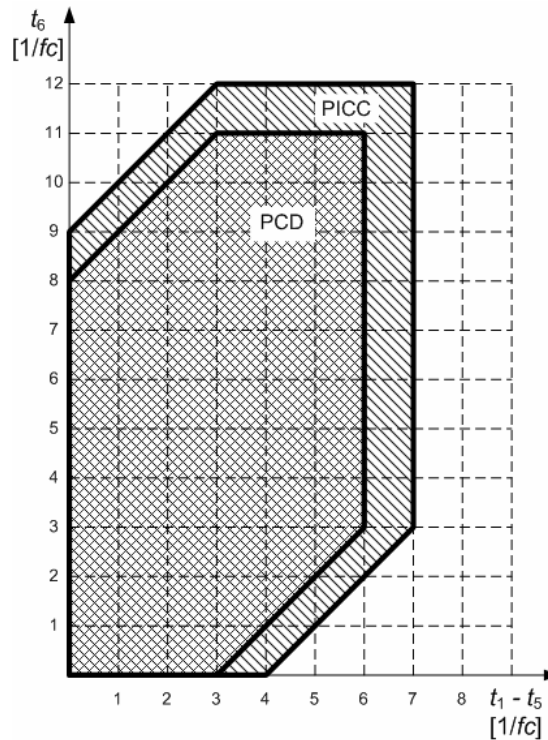


Figure 7 — Type A modulation waveform timing parameters for a bit rate of $fc/64$

PCD:

- If the fall time characterized by $(t_1 - t_5)$ is within the interval $0/fc$ and $3/fc$, the rise time t_6 shall be within the interval $0/fc$ and $(t_1 - t_5) + 8/fc$.
- If the fall time characterized by $(t_1 - t_5)$ is within the interval $3/fc$ and $6/fc$, the rise time t_6 shall be within the interval $(t_1 - t_5) - 3/fc$ and $t_{6, \max, \text{PCD}} = 11/fc$.

PICC:

- If the fall time characterized by $(t_1 - t_5)$ is within the interval $0/fc$ and $3/fc$, the PICC shall be able to receive a modulation waveform with a rise time t_6 within the interval $0/fc$ and $(t_1 - t_5) + 9/fc$.
- If the fall time characterized by $(t_1 - t_5)$ is within the interval $3/fc$ and $4/fc$, the PICC shall be able to receive a modulation waveform with a rise time t_6 within the interval $0/fc$ and $12/fc$.
- If the fall time characterized by $(t_1 - t_5)$ is within the interval $4/fc$ and $7/fc$, the PICC shall be able to receive a modulation waveform with a rise time t_6 within the interval $(t_1 - t_5) - 4/fc$ and $t_{6, \max, \text{PICC}} = 12/fc$.

The timing parameters of the PCD modulation waveform for a bit rate of $fc/32$ shall remain within limits specified by the following expressions and illustrated in Figure 8.

For a bit rate of $fc/32$ the PICC shall be able to receive a modulation waveform with timing parameters specified by the following expressions and illustrated in Figure 8.

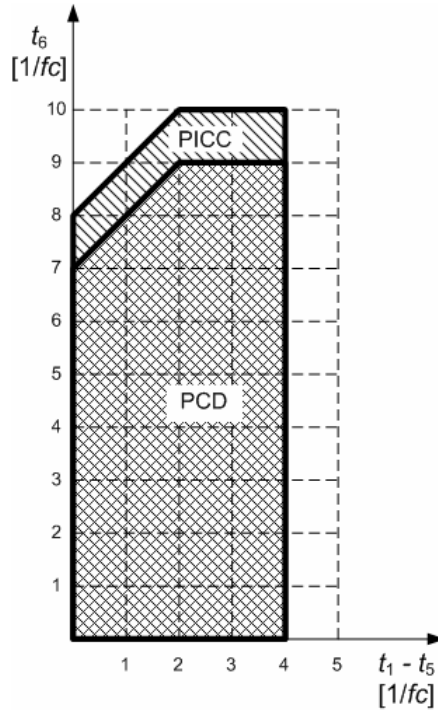


Figure 8 — Type A modulation waveform timing parameters for a bit rate of $fc/32$

PCD:

- If the fall time characterized by $(t_1 - t_5)$ is within the interval $0/fc$ and $2/fc$, the rise time t_6 shall be within the interval $0/fc$ and $(t_1 - t_5) + 7/fc$.
- If the fall time characterized by $(t_1 - t_5)$ is within the interval $2/fc$ and $4/fc$, the rise time t_6 shall be within the interval $0/fc$ and $t_{6, \max, PCD} = 9/fc$.

PICC:

- If the fall time characterized by $(t_1 - t_5)$ is within the interval $0/fc$ and $2/fc$, the PICC shall be able to receive a modulation waveform with a rise time t_6 within the interval $0/fc$ and $(t_1 - t_5) + 8/fc$.
- If the fall time characterized by $(t_1 - t_5)$ is within the interval $2/fc$ and $4/fc$, the PICC shall be able to receive a modulation waveform with a rise time t_6 within the interval $0/fc$ and $t_{6, \max, PICC} = 10/fc$.

The timing parameters of the PCD modulation waveform for a bit rate of $fc/16$ shall remain within limits specified by the following expressions and illustrated in Figure 9.

For a bit rate of $fc/16$ the PICC shall be able to receive a modulation waveform with timing parameters specified by the following expressions and illustrated in Figure 9.

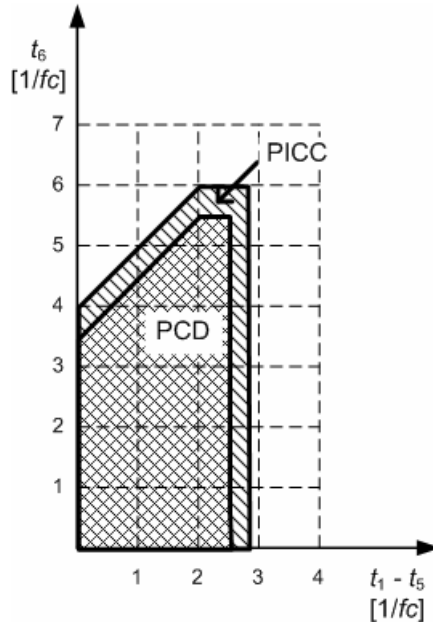


Figure 9 — Type A modulation waveform timing parameters for a bit rate of $fc/16$

PCD:

- If the fall time characterized by $(t_1 - t_5)$ is within the interval $0/fc$ and $2/fc$, the rise time t_6 shall be within the interval $0/fc$ and $(t_1 - t_5) + 3,5/fc$.
- If the fall time characterized by $(t_1 - t_5)$ is within the interval $2/fc$ and $2,75/fc$, the rise time t_6 shall be within the interval $0/fc$ and $t_{6, \max, PCD} = 5,5/fc$.

PICC:

- If the fall time characterized by $(t_1 - t_5)$ is within the interval $0/fc$ and $2/fc$, the PICC shall be able to receive a modulation waveform with a rise time t_6 within the interval $0/fc$ and $(t_1 - t_5) + 4/fc$.
- If the fall time characterized by $(t_1 - t_5)$ is within the interval $2/fc$ and $2,75/fc$, the PICC shall be able to receive a modulation waveform with a rise time t_6 within the interval $0/fc$ and $t_{6, \max, PICC} = 6/fc$.

8.1.3 Bit representation and coding

The following sequences are defined:

- sequence X: after a time of half the bit duration (t_x) a PauseA shall occur,
- sequence Y: for the full bit duration (t_b) no modulation shall occur,
- sequence Z: at the beginning of the bit duration (t_b) a PauseA shall occur.

Figure 10 together with the timing parameters in Table 7 illustrate sequences X, Y and Z.

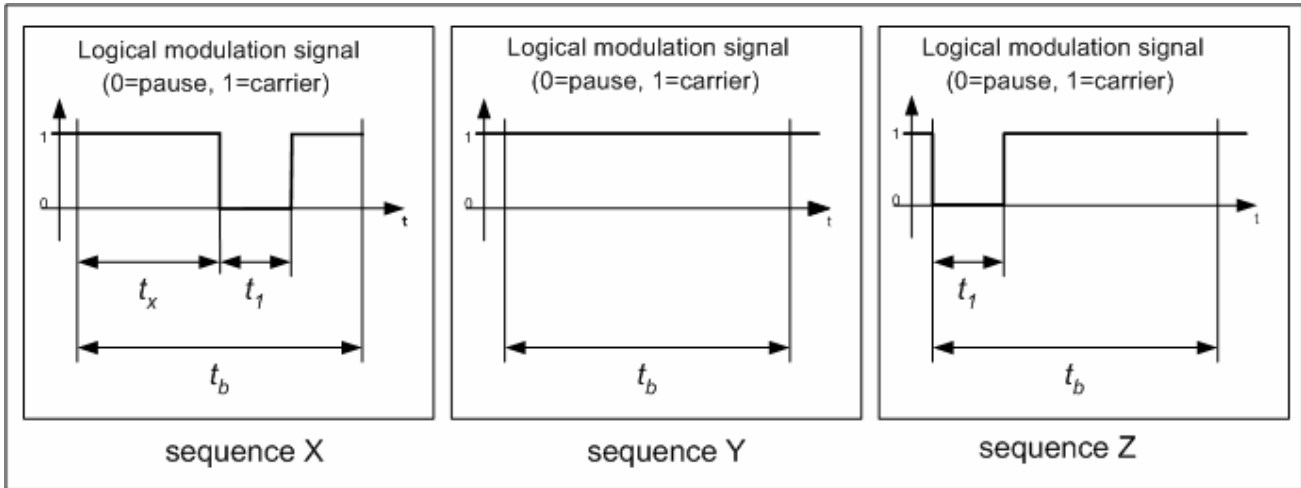


Figure 10 — Sequences for Type A communication PCD to PICC

Table 7 — Parameters for sequences

Parameter	Bit rate			
	$fc/128$	$fc/64$	$fc/32$	$fc/16$
t_b	$128/fc$	$64/fc$	$32/fc$	$16/fc$
t_x	$64/fc$	$32/fc$	$16/fc$	$8/fc$
t_1	see t_1 of Table 3	see t_1 of Table 5		

The above sequences shall be used to code the following information:

- logic “1”: sequence X,
- logic “0”: sequence Y with the following two exceptions:
 - i) If there are two or more contiguous “0”s, sequence Z shall be used from the second “0” on,
 - ii) If the first bit after a “start of frame” is “0”, sequence Z shall be used to represent this and any “0”s which follow directly thereafter,
- start of communication: sequence Z,
- end of communication: logic “0” followed by sequence Y,
- no information: at least two sequences Y.

8.2 Communication PICC to PCD

8.2.1 Bit rate

The bit rate for the transmission during initialization and anticollision shall be $fc/128$ (~106 kbit/s).

The bit rate for the transmission after initialization and anticollision shall be one of the following:

- $fc/128$ (~106 kbit/s),
- $fc/64$ (~212 kbit/s),
- $fc/32$ (~424 kbit/s),
- $fc/16$ (~848 kbit/s).

8.2.2 Load modulation

The PICC shall be capable of communication to the PCD via an inductive coupling area where the carrier frequency is loaded to generate a subcarrier with frequency f_s . The subcarrier shall be generated by switching a load in the PICC.

The load modulation amplitude V_{LMA} of the PICC shall be at least $22/H^{0.5}$ (mV (peak)) when measured as described in ISO/IEC 10373-6, where H is the (rms) value of magnetic field strength in A/m. The PCD shall be able to receive a V_{LMA} of at least $18/H^{0.5}$ (mV (peak)) when measured as described in ISO/IEC 10373-6, where H is the (rms) value of magnetic field strength in A/m.

Figure 11 is an illustration of the PCD and PICC load modulation amplitude limits.

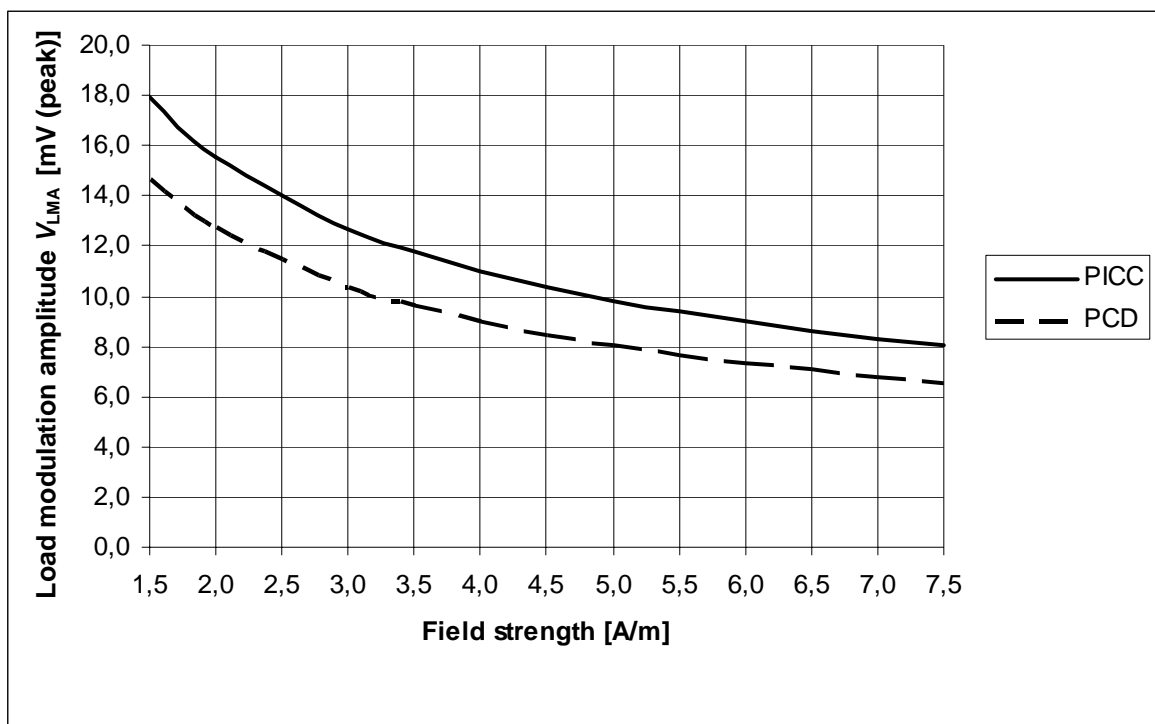


Figure 11 — Load modulation amplitude

NOTE This PICC limit is stricter than in ISO/IEC 14443-2:2001 and may be too strict for PICCs whose antenna is much smaller than Class 1 size (due to the size of the sense coil in the testing standard). Future revisions of ISO/IEC 14443 and ISO/IEC 10373-6 may specify new limits and/or test methods adapted to these PICCs.

8.2.3 Subcarrier

The frequency f_s of the subcarrier shall be $f_c/16$ (~848 kHz). Consequently, during initialization and anticollision, one bit duration is equivalent to 8 periods of the subcarrier. After initialisation and anticollision, the number of subcarrier periods is determined by the bit rate.

The PICC shall generate a subcarrier only when data is to be transmitted.

8.2.4 Subcarrier modulation

Every bit period shall start with a defined phase relation to the subcarrier. The bit period shall start with the loaded state of the subcarrier (the unloaded state of the subcarrier is the stable state when the PICC is not sending bits).

At the bit rate of $f_c/128$ the subcarrier is modulated using OOK with the sequences defined in 8.2.5.1. At bit rates of $f_c/64$, $f_c/32$ and $f_c/16$ the subcarrier is modulated using BPSK with the sequences defined in 8.2.5.2.

8.2.5 Bit representation and coding

8.2.5.1 Bit representation and coding for a bit rate of $f_c/128$

The following sequences are defined:

- sequence D: the carrier shall be modulated with the subcarrier for the first half (50 %) of the bit duration,
- sequence E: the carrier shall be modulated with the subcarrier for the second half (50 %) of the bit duration,
- sequence F: the carrier is not modulated with the subcarrier for one bit duration.

Bit coding shall be Manchester with the following definitions:

- logic "1": sequence D,
- logic "0": sequence E,
- start of communication: sequence D,
- end of communication: sequence F,
- no information: no subcarrier.

8.2.5.2 Bit representation and coding for bit rates of $f_c/64$, $f_c/32$ and $f_c/16$

Bit coding shall be NRZ-L with the following definitions:

- logic "1": the carrier shall be modulated with the subcarrier for one bit duration,
- logic "0": the carrier shall be modulated with the inverted subcarrier for one bit duration,
- start of communication: burst of 32 subcarrier cycles (phase as logic "1") followed by inverted subcarrier for one bit duration (phase as logic "0"),
- end of communication: the carrier is not modulated with the subcarrier for one bit duration,
- no information: the carrier is not modulated with the subcarrier.

9 Communication signal interface Type B

9.1 Communication PCD to PICC

9.1.1 Bit rate

The bit rate for the transmission during initialization and anticollision shall be nominally $fc/128$ (~106 kbit/s).

The bit rate for the transmission after initialization and anticollision shall be one of the following:

- $fc/128$ (~106 kbit/s),
- $fc/64$ (~212 kbit/s),
- $fc/32$ (~424 kbit/s),
- $fc/16$ (~848 kbit/s).

Tolerance and bit boundaries are defined in ISO/IEC 14443-3, 7.1.1 and 7.1.2.

9.1.2 Modulation

Communication from PCD to PICC shall use the modulation principle of ASK 10 % of the RF operating field.

The modulation waveform shall comply with Figure 12. The rising and falling edges of the modulation shall be monotonic. The rise and fall times (t_r , t_f) shall be measured between 10 % and 90 % of the actual modulation step.

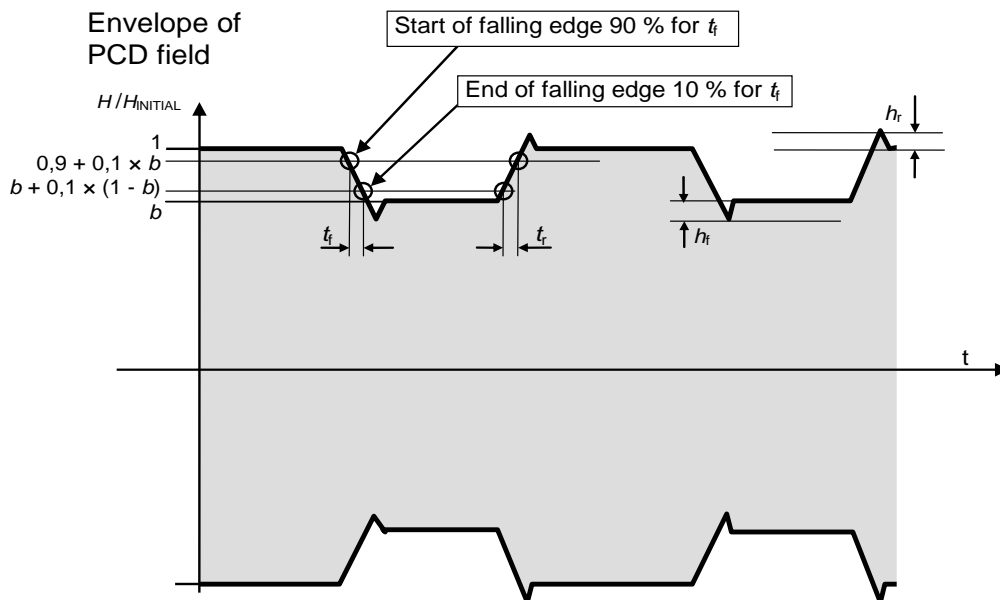


Figure 12 — Type B modulation waveform

The overshoots of the PCD modulation waveform shall remain within limits specified in Table 8.

Table 8 — PCD transmission: Overshoots for bit rates of *fc/128*, *fc/64*, *fc/32* and *fc/16*

Parameter	Min	Max
h_f	0	$(1,0 - t_f / (2 \times t_{f, \max, \text{PCD}})) \times 0,10 \times (1 - b)$
h_r	0	$(1,0 - t_r / (2 \times t_{r, \max, \text{PCD}})) \times 0,10 \times (1 - b)$

NOTE The maximum value of h_f / h_r is a function of the measured value of t_f / t_r .

The rising time t_r and the falling time t_f shall remain within limits specified in Table 9.

Table 9 — PCD transmission: Maximum rise and fall times for bit rates of *fc/128*, *fc/64*, *fc/32* and *fc/16*

Bit rates	$t_{r, \max, \text{PCD}}$	$t_{f, \max, \text{PCD}}$
<i>fc/128</i>	$16/fc$	$16/fc$
<i>fc/64</i>	$14/fc$	$14/fc$
<i>fc/32</i>	$11/fc$	$11/fc$
<i>fc/16</i>	$8/fc$	$8/fc$

The PICC shall be able to receive a modulation waveform with overshoots defined in Table 10.

Table 10 — PICC reception: Overshoots for bit rates of *fc/128*, *fc/64*, *fc/32* and *fc/16*

Parameter	Min	Max
h_f	0	$(1,0 - t_f / (2 \times t_{f, \max, \text{PICC}})) \times 0,11 \times (1 - b)$
h_r	0	$(1,0 - t_r / (2 \times t_{r, \max, \text{PICC}})) \times 0,11 \times (1 - b)$

NOTE The maximum value of h_f / h_r is a function of the set value of t_f / t_r .

The PICC shall be able to receive a modulation waveform with rising time t_r and falling time t_f defined in Table 11.

Table 11 — PICC reception: Maximum rise and fall times for bit rates of *fc/128*, *fc/64*, *fc/32* and *fc/16*

Bit rates	$t_{r, \max, \text{PICC}}$	$t_{f, \max, \text{PICC}}$
<i>fc/128</i>	$17/fc$	$17/fc$
<i>fc/64</i>	$14/fc$	$14/fc$
<i>fc/32</i>	$11/fc$	$11/fc$
<i>fc/16</i>	$8/fc$	$8/fc$

The modulation index m of the PCD modulation waveform shall remain for all supported bit rates within limits specified by the following expressions and illustrated in Figure 13.

For all supported bit rates the PICC shall be able to receive a modulation waveform with modulation index m specified by the following expressions and illustrated in Figure 13.

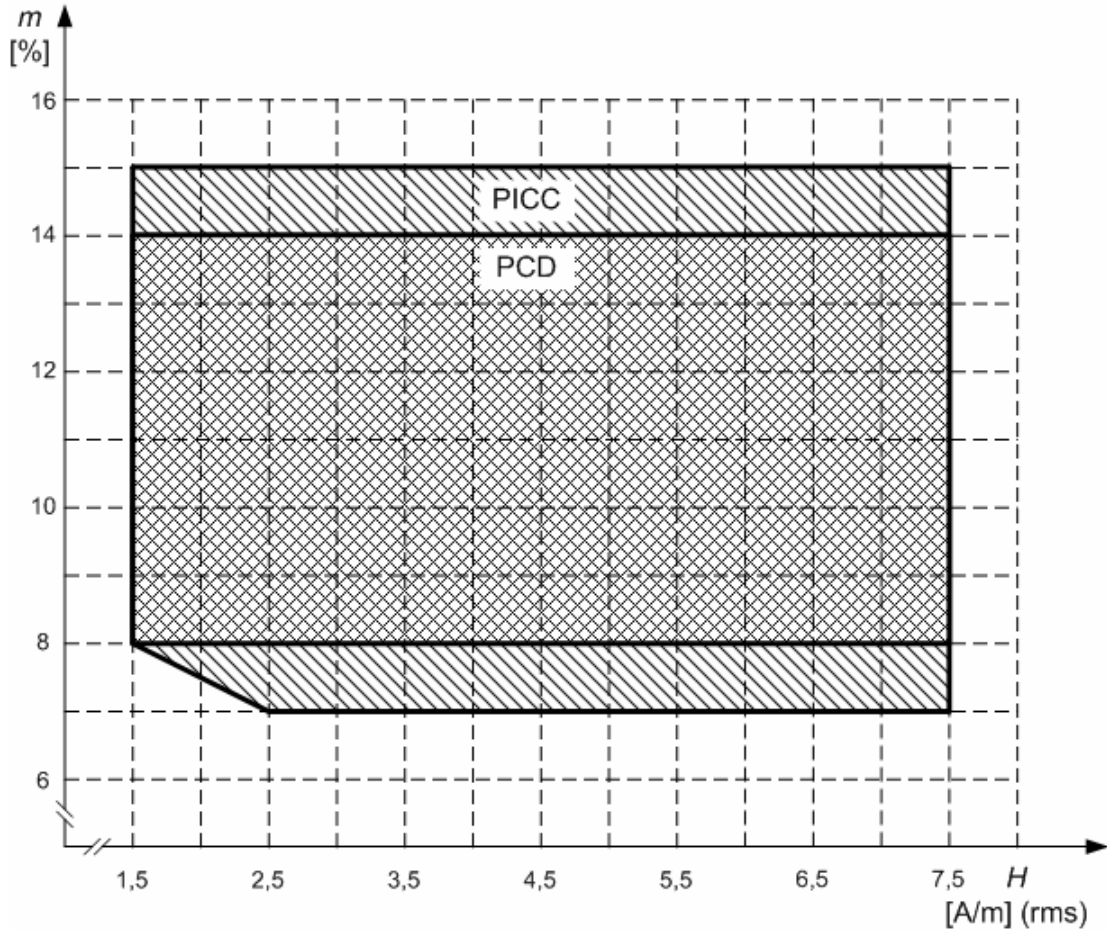


Figure 13 — Type B modulation index m for bit rates of $fc/128$, $fc/64$, $fc/32$ and $fc/16$

PCD:

- If the (rms) value of the magnetic field strength H is within the interval 1,5 A/m and 7,5 A/m, then the modulation index m in % shall be within the interval 8 % and 14 %.

PICC:

- If the (rms) value of the magnetic field strength H is within the interval 1,5 A/m and 2,5 A/m, then the PICC shall be able to receive a modulation waveform with m in % within the interval 9,5 - H and 15 %.
- If the (rms) value of the magnetic field strength H is within the interval 2,5 A/m and 7,5 A/m, then the PICC shall be able to receive a modulation waveform with m in % within the interval 7% and 15%.

The timing parameters of the PCD modulation waveform for a bit rate of $fc/128$ shall remain within limits specified by the following expressions and illustrated in Figure 14.

For a bit rate of $fc/128$ the PICC shall be able to receive a modulation waveform with timing parameters specified by the following expressions and illustrated in Figure 14.

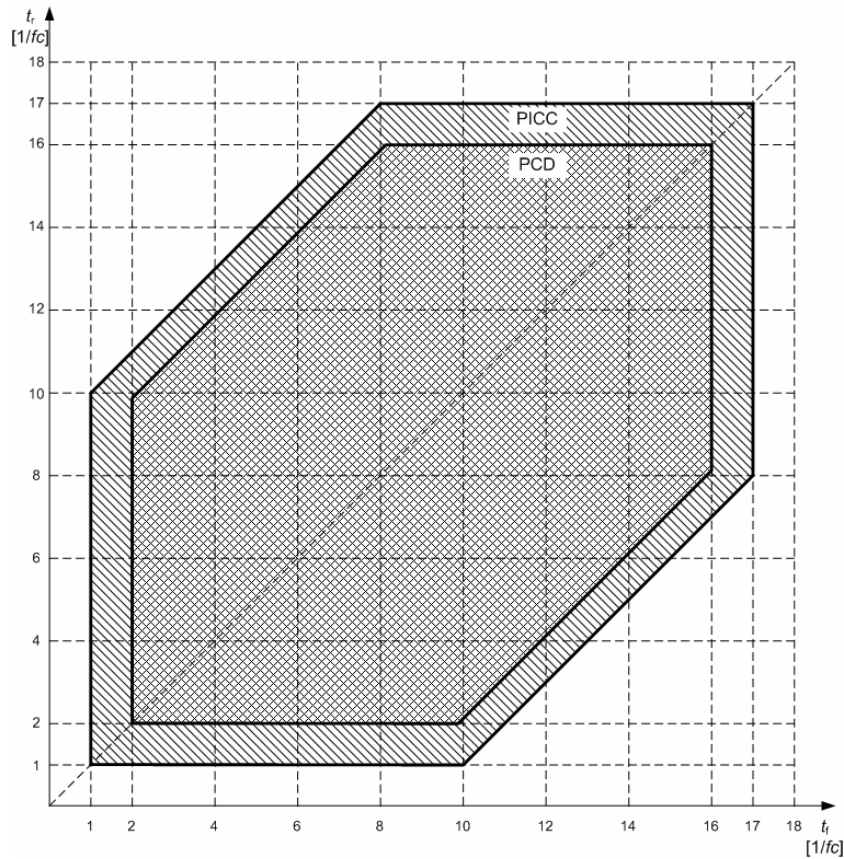


Figure 14 — Type B modulation waveform timing parameters for a bit rate of $fc/128$

PCD:

- If the fall time t_f is within the interval $2/fc$ and $8/fc$, the rise time t_r shall be within the interval $2/fc$ and $t_f + 8/fc$.
- If the fall time t_f is within the interval $8/fc$ and $10/fc$, the rise time t_r shall be within the interval $2/fc$ and $16/fc$.
- If the fall time t_f is within the interval $10/fc$ and $16/fc$, the rise time t_r shall be within the interval $t_f - 8/fc$ and $t_{r, \max, PCD} = 16/fc$.

PICC:

- If the fall time t_f is within the interval $1/fc$ and $8/fc$, the PICC shall be able to receive a modulation waveform with a rise time t_r within the interval $1/fc$ and $t_f + 9/fc$.
- If the fall time t_f is within the interval $8/fc$ and $10/fc$, the PICC shall be able to receive a modulation waveform with a rise time t_r within the interval $1/fc$ and $17/fc$.
- If the fall time t_f is within the interval $10/fc$ and $17/fc$, the PICC shall be able to receive a modulation waveform with a rise time t_r within the interval $t_f - 9/fc$ and $t_{r, \max, PICC} = 17/fc$.

The timing parameters of the PCD modulation waveform for a bit rate of $fc/64$ shall remain within limits specified by the following expressions and illustrated in Figure 15.

For a bit rate of $fc/64$ the PICC shall be able to receive a modulation waveform with timing parameters specified by the following expressions and illustrated in Figure 15.

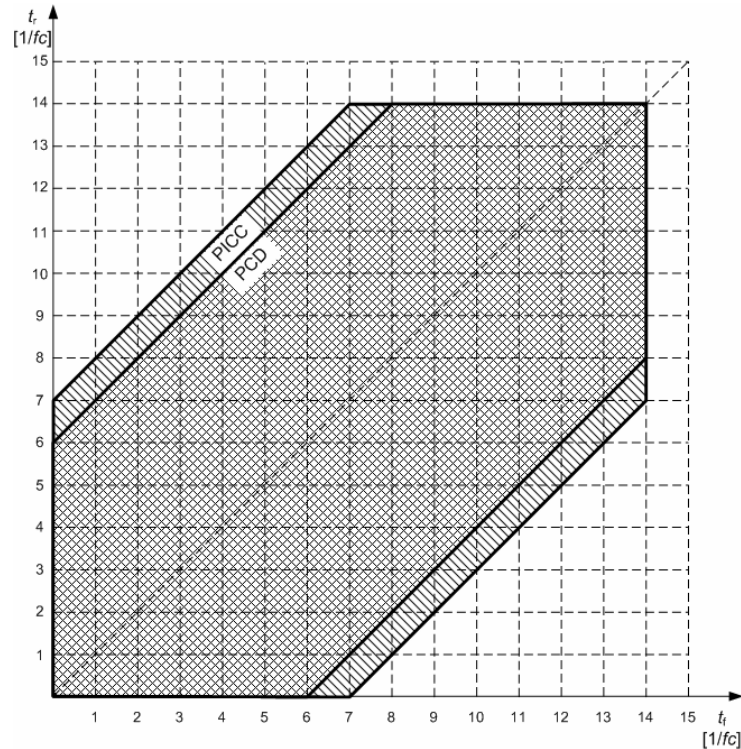


Figure 15 — Type B modulation waveform timing parameters for a bit rate of $fc/64$

PCD:

- If the fall time t_f is within the interval $0/fc$ and $6/fc$, the rise time t_r shall be within the interval $0/fc$ and $t_f + 6/fc$.
- If the fall time t_f is within the interval $6/fc$ and $8/fc$, the rise time t_r shall be within the interval $t_f - 6/fc$ and $t_f + 6/fc$.
- If the fall time t_f is within the interval $8/fc$ and $14/fc$, the rise time t_r shall be within the interval $t_f - 6/fc$ and $t_{r, \max, PCD} = 14/fc$.

PICC:

- If the fall time t_f is within the interval $0/fc$ and $7/fc$, the PICC shall be able to receive a modulation waveform with a rise time t_r within the interval $0/fc$ and $t_f + 7/fc$.
- If the fall time t_f is within the interval $7/fc$ and $14/fc$, the PICC shall be able to receive a modulation waveform with a rise time t_r within the interval $t_f - 7/fc$ and $t_{r, \max, PICC} = 14/fc$.

The timing parameters of the PCD modulation waveform for a bit rate of $fc/32$ shall remain within limits specified by the following expressions and illustrated in Figure 16.

For a bit rate of $fc/32$ the PICC shall be able to receive a modulation waveform with timing parameters specified by the following expressions and illustrated in Figure 16.

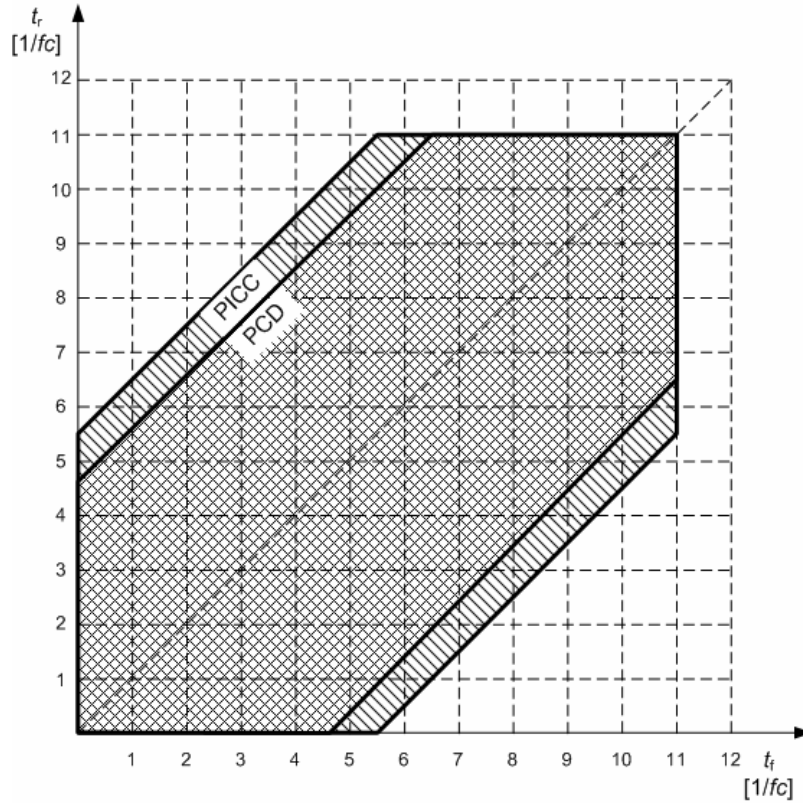


Figure 16 — Type B modulation waveform timing parameters for a bit rate of $fc/32$

PCD:

- If the fall time t_f is within the interval $2/fc$ and $4,5/fc$, the rise time t_r shall be within the interval $0/fc$ and $t_f + 4,5/fc$.
- If the fall time t_f is within the interval $4,5/fc$ and $6,5/fc$, the rise time t_r shall be within the interval $t_f - 4,5/fc$ and $t_f + 4,5/fc$.
- If the fall time t_f is within the interval $6,5/fc$ and $11/fc$, the rise time t_r shall be within the interval $t_f - 4,5/fc$ and $t_{r, \max, PCD} = 11/fc$.

PICC:

- If the fall time t_f is within the interval $0/fc$ and $5,5/fc$, the PICC shall be able to receive a modulation waveform with a rise time t_r within the interval $0/fc$ and $t_f + 5,5/fc$.
- If the fall time t_f is within the interval $5,5/fc$ and $11/fc$, the PICC shall be able to receive a modulation waveform with a rise time t_r within the interval $t_f - 5,5/fc$ and $t_{r, \max, PICC} = 11/fc$.

The timing parameters of the PCD modulation waveform for a bit rate of $fc/16$ shall remain within limits specified by the following expressions and illustrated in Figure 17.

For a bit rate of $fc/16$ the PICC shall be able to receive a modulation waveform with timing parameters specified by the following expressions and illustrated in Figure 17.

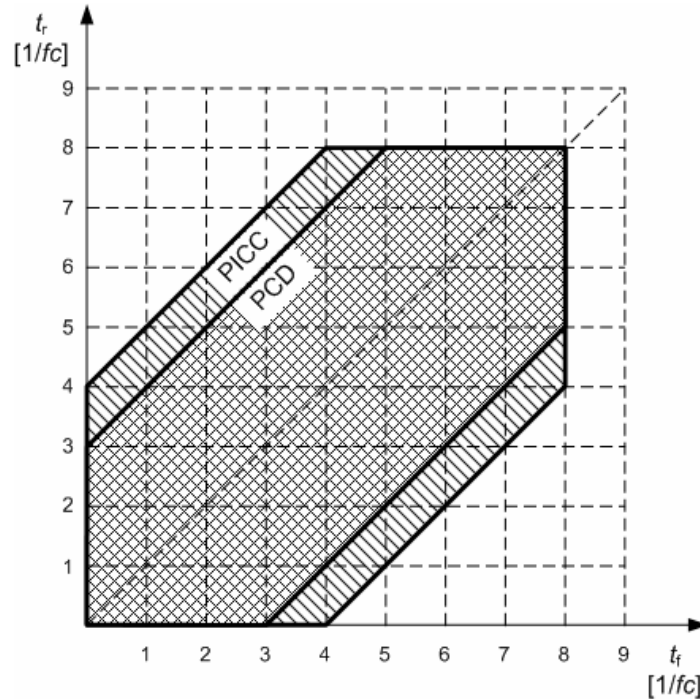


Figure 17 — Type B modulation waveform timing parameters for a bit rate of $fc/16$

PCD:

- If the fall time t_f is within the interval $0/fc$ and $3/fc$, the rise time t_r shall be within the interval $0/fc$ and $t_f + 3/fc$.
- If the fall time t_f is within the interval $3/fc$ and $5/fc$, the rise time t_r shall be within the interval $t_f - 3/fc$ and $t_f + 3/fc$.
- If the fall time t_f is within the interval $5/fc$ and $8/fc$, the rise time t_r shall be within the interval $t_f - 3/fc$ and $t_{r, \max, PCD} = 8/fc$.

PICC:

- If the fall time t_f is within the interval $0/fc$ and $4/fc$, the PICC shall be able to receive a modulation waveform with a rise time t_r within the interval $0/fc$ and $t_f + 4/fc$.

If the fall time t_f is within the interval $4/fc$ and $8/fc$, the PICC shall be able to receive a modulation waveform with a rise time t_r within the interval $t_f - 4/fc$ and $t_{r, \max, PICC} = 8/fc$.

9.1.3 Bit representation and coding

Bit coding format shall be NRZ-L with logic levels defined as follows:

- logic "1": carrier high field amplitude (no modulation applied),
- logic "0": carrier low field amplitude.

9.2 Communication PICC to PCD

9.2.1 Bit rate

See clause 8.1.1

9.2.2 Load modulation

See clause 8.2.2.

9.2.3 Subcarrier

See clause 8.2.3.

9.2.4 Subcarrier modulation

The subcarrier shall be BPSK modulated. Phase shifts shall only occur at nominal positions of rising or falling edges of the subcarrier.

9.2.5 Bit representation and coding

Bit coding shall be NRZ-L where a change of logic level shall be denoted by a phase shift (180°) of the subcarrier.

The initial logic level for NRZ-L at the start of a PICC frame shall be established by the following sequence:

- After any command from the PCD a guard time TR0 shall apply in which the PICC shall not generate a subcarrier. TR0 shall be greater than $64/f_s$ (~75,5 μs).
- The PICC shall then generate a subcarrier with no phase transition for a synchronization time TR1. This establishes a subcarrier phase reference $\emptyset 0$. TR1 shall be greater than $80/f_s$ (~94,4 μs).
- This initial phase state $\emptyset 0$ of the subcarrier shall be defined as logic "1" so that the first phase transition represents a change from logic "1" to logic "0".
- Subsequently the logic level is defined according to the subcarrier phase reference:

$\emptyset 0$: represents logic "1",

$\emptyset 0 + 180^\circ$: represents logic "0".