

Telecommunications and Information Exchange Between Systems

ISO/IEC JTC 1/SC 6

Document Number:	N14261
Date:	2010-04-19
Replaces:	
Document Type:	Working Draft
Document Title:	First Working Draft of ISO/IEC 21481, Information technology — Telecommunications and information exchange between systems — Near Field Communication Interface and Protocol -2 (NFCIP-2)
Document Source:	Ad hoc group meeting on NFC
Project Number:	
Document Status:	For review and expect to finalize at Croatia Ad hoc.
Action ID:	ACT
Due Date:	
No. of Pages:	12
ISO/IEC JTC1/SC6 Secretariat Ms. Jooran Lee, KSA (on behalf of KATS) Korea Technology Center #701-7 Yeoksam-dong, Gangnam-gu, Seoul, 135-513, Republic of Korea ; Telephone: +82 2 6009 4808 ; Facsimile: +82 2 6009 4819 ; Email : jooran@kisi.or.kr	

ISO/IEC JTC 1/SC 6

Date: 2004-03-30¹⁸

ISO/IEC 21481:2004(E)

ISO/IEC JTC 1/SC 6

Secretariat: KATS

**Information technology — Telecommunications and information
exchange between systems — Near Field Communication Interface and
Protocol -2 (NFCIP-2)**

Élément introductif — Élément central — Élément complémentaire

Document type: International Standard
Document subtype:
Document stage: (60) Publication
Document language: E

G:\6N14261.doc STD Version 2.1

Copyright notice

This ISO document is a Draft International Standard and is copyright-protected by ISO. Except as permitted under the applicable laws of the user's country, neither this ISO draft nor any extract from it may be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, photocopying, recording or otherwise, without prior written permission being secured.

Requests for permission to reproduce should be addressed to either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Reproduction may be subject to royalty payments or a licensing agreement.

Violators may be prosecuted.

Contents

Page

1	Scope	1
2	Conformance	1
3	Normative references	1
4	Terms and definitions	1
5	Conventions and notations	2
5.1	Names	2
6	External RF field threshold value	2
7	RF Field detection	2
8	Mode selection.....	2
9	RF detection and Initial RF generation.....	5

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

ISO/IEC 21481 was prepared by Ecma International (as ECMA-352) and was adopted, under a special “fast-track procedure”, by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, in parallel with its approval by national bodies of ISO and IEC.

Introduction

In 2002, Ecma International formed Task Group 19 of Technical Committee 32 to specify Near Field Communication (NFC) signal interfaces and protocols. The NFC devices are wireless closely coupled devices communicating at 13,56 MHz.

Although ISO/IEC 18092, ISO/IEC 14443 and ISO/IEC 15693 standards all specify 13,56 MHz as their working frequency, they specify distinct communication modes. These are defined as NFC, PCD, PICC, and VCD communication modes respectively.

This NFCIP-2 Standard specifies the mechanism to detect and select one communication mode out of those four possible communication modes. Furthermore, NFCIP-2 requires that subsequent behaviour be as specified in the standard specifying the selected communication mode.

The ISO/IEC JTC 1/SC 06/WG1/SG on harmonisation prepared this draft in 2009; it adds support for the PICC mode from ISO/IEC 14443.

Information technology — Telecommunications and information exchange between systems — Near Field Communication Interface and Protocol -2 (NFCIP-2)

1 Scope

ISO/IEC 18092, ISO/IEC 14443 and ISO/IEC 15693 standards specify the RF signal interface, initialisation, anti-collision and protocols for wireless interconnection of closely coupled devices and access to contactless integrated circuit cards operating at 13,56 MHz.

This International Standard specifies the communication mode selection mechanism, designed to not disturb any ongoing communication at 13,56 MHz, for devices implementing ISO/IEC 18092, ISO/IEC 14443 and ISO/IEC 15693. This International Standard requires implementations to enter the selected communication mode as specified in the respective standard. The communication mode specifications, however, are outside the scope of this NFCIP-2 Standard.

2 Conformance

A conforming implementation complies with all the mandatory clauses in this International Standard.

3 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 18092, *Information technology -- Telecommunications and information exchange between systems -- Near Field Communication -- Interface and Protocol (NFCIP-1)*

ISO/IEC 14443, *Identification cards -- Contactless integrated circuit(s) cards -- Proximity cards*

ISO/IEC 15693, *Identification cards -- Contactless integrated circuit(s) cards -- Vicinity cards*

4 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

4.1

H_{Threshold}

the minimum value of an external RF field that a NFCIP-2 device shall detect to not disturb ongoing communication by ensuring that its own RF field is switched off.

4.2

NFC MODE

mode in which NFCIP-2 device operates as specified in ISO/IEC 18092.

4.3

fc

carrier frequency [ISO/IEC 18092]

frequency [ISO/IEC 14443-2, ISO/IEC 15693]

4.4

PICC

Proximity Integrated Circuit Card or Object as specified in ISO/IEC 14443.

4.5

PICC MODE

mode in which NFCIP-2 device operates as PICC as specified in ISO/IEC 14443.

4.6

PCD

Proximity Coupling Device as specified in ISO/IEC 14443.

4.7

PCD MODE

mode in which NFCIP-2 device operates as PCD as specified in ISO/IEC 14443.

4.8

VCD

Vicinity Coupling Device as specified in ISO/IEC 15693.

4.9

VCD MODE

mode in which NFCIP-2 device operates as VCD as specified in ISO/IEC 15693.

5 Conventions and notations

5.1 Names

The names of basic elements, e.g. specific fields, are written with a capital initial letter.

6 External RF field threshold value

NFCIP-2 devices shall detect external RF fields at f_c with a value higher than $H_{\text{THRESHOLD}}$ while performing external RF field detection.

The value of $H_{\text{THRESHOLD}} = 0,1875 \text{ A/m}$.

7 RF Field detection

In order to not disturb any communication on f_c , an NFCIP-2 device shall not switch on its RF field when it detects an external RF field, as specified in [Clause 6](#).

8 Mode selection

Mode selection specifies the procedure for NFCIP-2 devices to select and subsequently enter one of the **NFC MODE**, or the **PCD MODE** or **PICC MODE** or **VCD MODE**.

NFCIP-2 devices shall implement the following functions:

1. Initiator and target as specified in ISO/IEC 18092;
2. **PCD** as specified in ISO/IEC 14443;
3. **VCD** as specified in ISO/IEC 15693; and
4. **PICC** as specified in ISO/IEC 14443.

NFCIP-2 devices shall execute the following sequence:

1. The NFCIP-2 device shall have its RF field switched off.
2. If the NFCIP-2 device detects an external RF field, as specified in [Clause 6](#), it shall select either the **PICC MODE** or the **NFC MODE**.
3. If the NFCIP-2 device does not detect an external RF field it shall select the **NFC MODE**, or the **PCD MODE** or the **VCD MODE**.
4. If the NFCIP-2 device has selected the **NFC MODE**, it shall enter the **NFC MODE**.
5. NFCIP-2 devices that have selected either the **PCD MODE** or **VCD MODE**, shall perform RF detection, Initial RF generation and subsequently enter the selected mode as specified in [Clause 9](#).

[Figure 1](#) illustrates the above procedure.

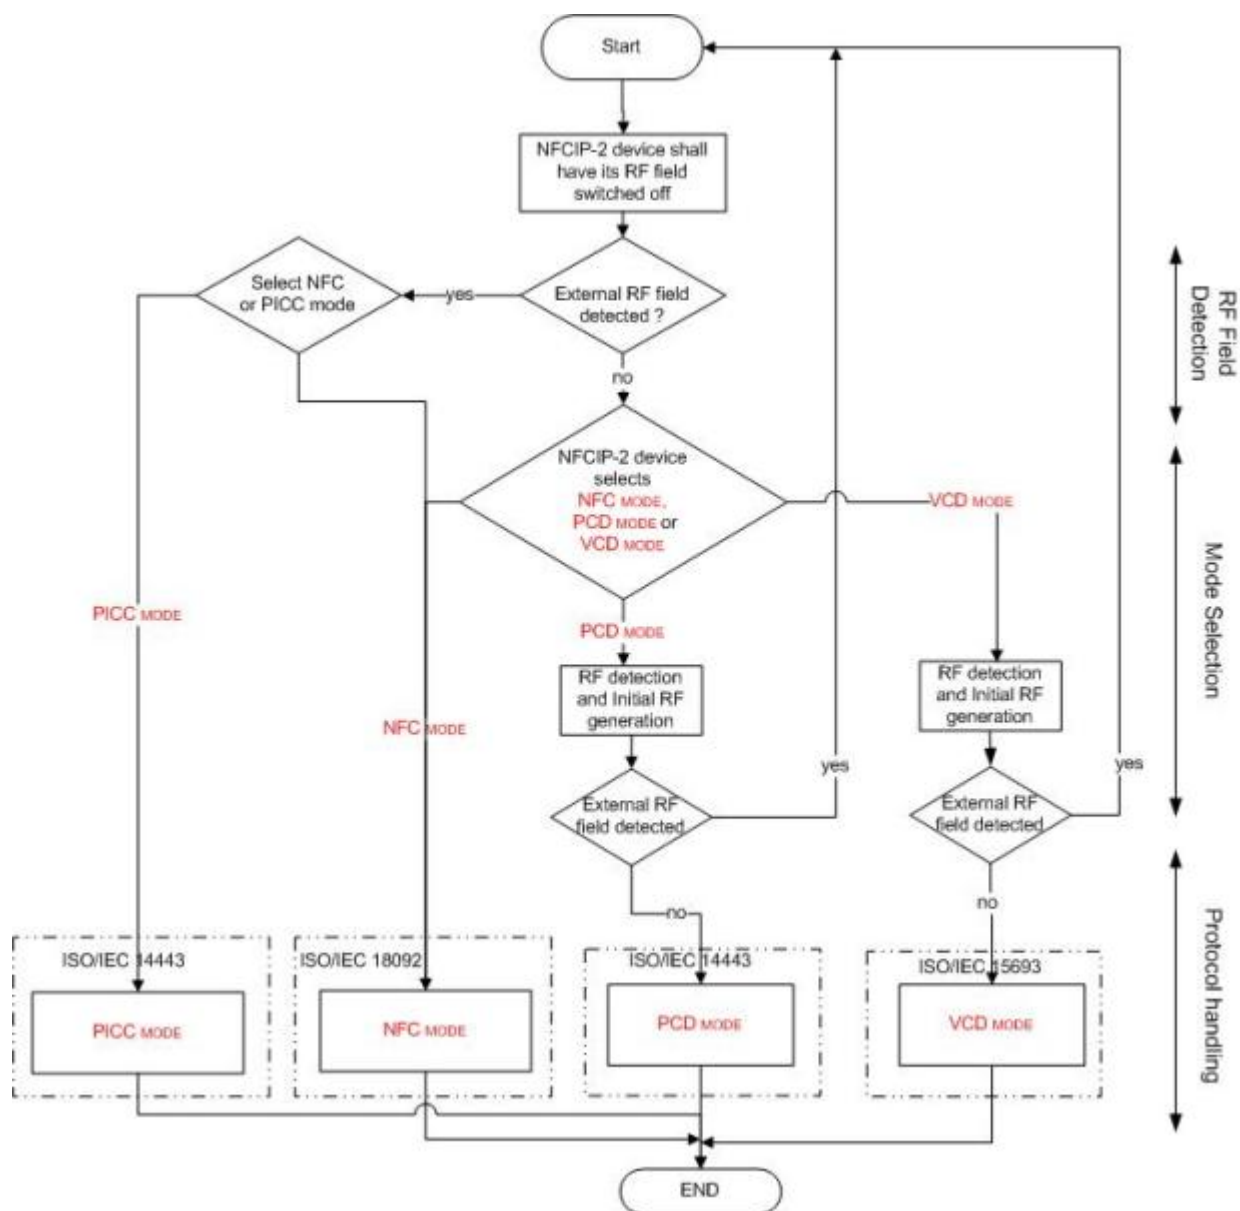


Figure 1 – [Mode selection](#)

9 RF detection and Initial RF generation

Any NFCIP-2 device having selected the **PCD MODE** or the **VCD MODE** shall continue the mode selection sequence and comply with the timing as specified below.

When the NFCIP-2 device detects an external RF field, as specified in [Clause 7](#), during the time $T_{IDT} + n \times T_{RFW}$ it shall recommence the mode selection procedure that is specified in [Clause 8](#).

If the NFCIP-2 device does not detect an external RF field during the time $T_{IDT} + n \times T_{RFW}$, it shall switch on its RF field, and enter the selected communication mode.

[Figure 2](#) illustrates the RF detection and initial RF generation.

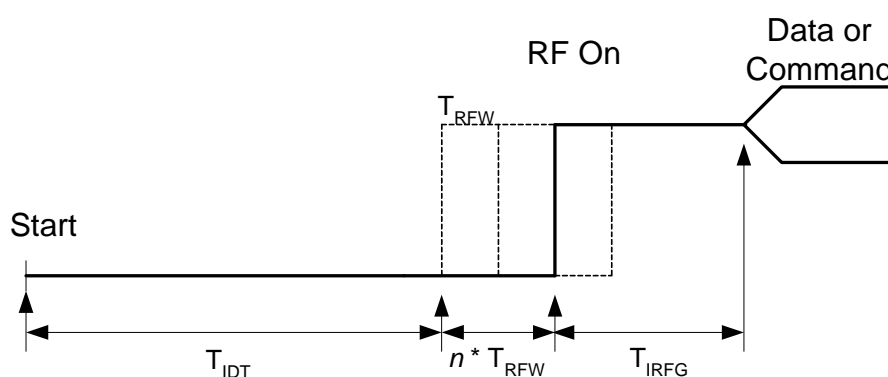


Figure 2 – RF detection and initial RF generation for **PCD MODE and **VCD MODE****

T_{IDT} : Initial delay time. $T_{IDT} > 4\,096 / f_c$ (~300 μ s)

T_{RFW} : RF waiting time. $512 / f_c$ (~38 μ s)

n : randomly generated integer $0 \leq n \leq 3$

T_{IRFG} : Initial guard-time between switching on RF field and start modulation to send command or data. The specification of T_{IRFG} is not part of this International Standard.

In **PCD MODE** the time between switching on the RF field and modulating the field to transmit data is specified in Clause 5 of ISO/IEC 14443-2.

In **VCD MODE** the time between switching on the RF field and modulating the field to transmit data is specified in Clause 7.3 of ISO/IEC 15693-2.